




FOXTROT




13 Constellation

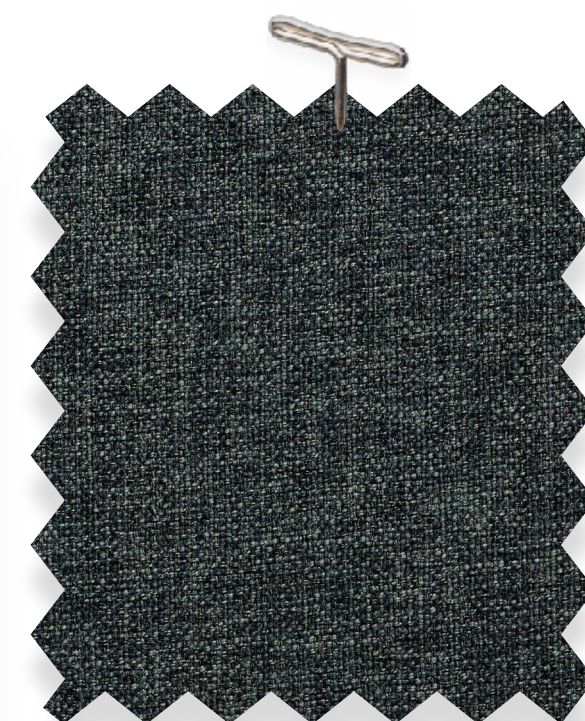

25 Denim Wash



72 Raindance

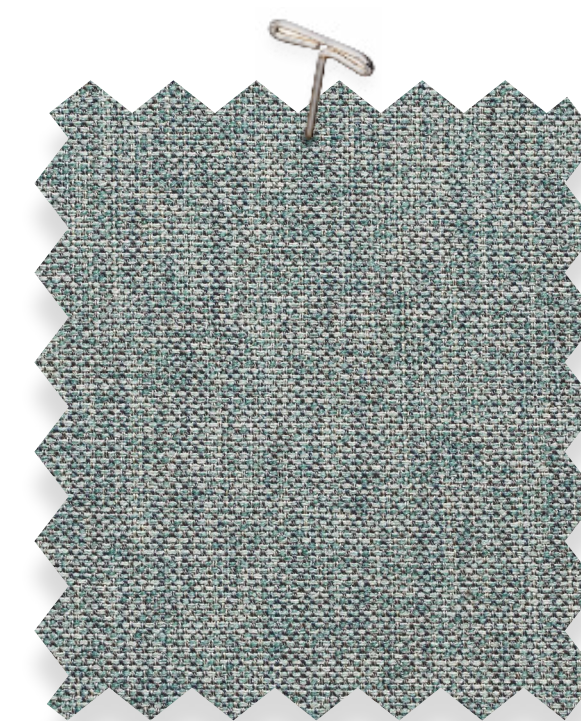

48 Moonstone



39 Honeydew



83 Tigereye



02 Aloe




31 Goldilocks



60 Platinum



05 Ash

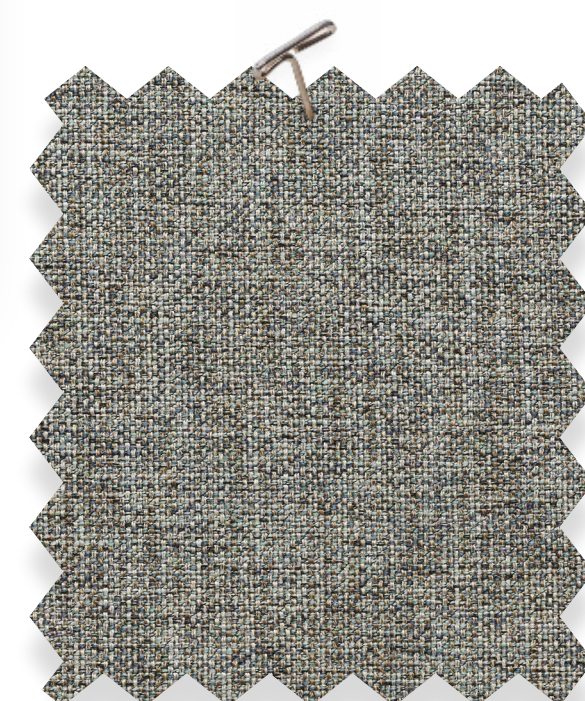

54 Mountain View



28 Glimmer



95 Zinc

SPECS & INFO

Specifications

Content	100% Polyester
Width	54"
Origin	China
Repeat	None
Finish	Incase Soil & Stain Finish

Performance Characteristics

Abrasion Resistance	100,000 Double Rubs	ASTM D4157-13
Colorfastness To Light	Class 4 @ 40 Hours	AATCC 16
Crocking Resistance	Wet: Grade 5 Dry: Grade 5	AATCC 8
Pilling	Class 4	ASTM D3511
Seam Slippage	Warp: 25.4 lbs. Weft: 35.2 lbs.	ASTM D4034
Breaking Strength	Warp: 425.6 lbs. Weft: 318.2 lbs.	ASTM D5034

Applications

Upholstery, Indoor

Product Notes

- Prop 65 Compliant
- California AB-2998 Compliant

Flammability

- CA Technical Bulletin 117-2013
- NFPA 260

For additional product information including detailed cleaning instructions visit our website, [unitedfabrics.com](https://www.unitedfabrics.com)



FOXTROT

