



ROADTRIP




90 Torch



30 Grizzly



58 Mercury

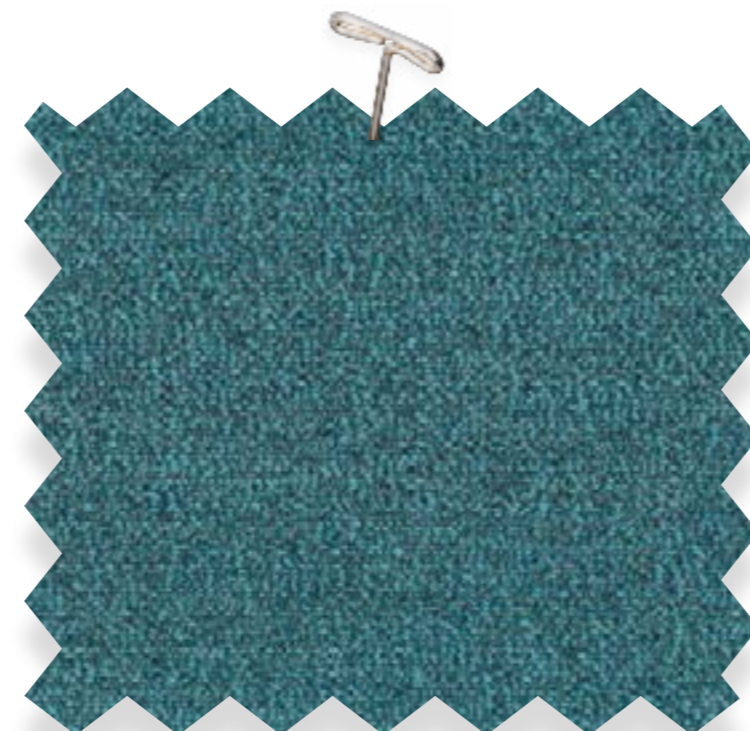

13 Calypso



44 Ink



67 Nightfall



16 Crater



85 Sandy



51 Marble

SPECS & INFO



ROADTRIP

Specifications

Content	100% Polyester
Width	54"
Origin	China
Repeat	None
Finish	Resilience TX Soil/Stain Protection

Performance Characteristics



Abrasion Resistance	100,000 Double Rubs	ASTM D4157-13
Colorfastness To Light	Class 5 @ 40 Hours	AATCC 16
Crocking Resistance	Wet: Grade 5 Dry: Grade 4.5	AATCC 8
Pilling	Class 4.5	ASTM D3511
Seam Slippage	Warp: 107.8 lbs. Weft: 96.2 lbs.	ASTM D4034
Breaking Strength	Warp: 277 lbs. Weft: 239 lbs.	ASTM D5034

Applications

Upholstery, Indoor

Product Notes

- Prop 65 Compliant
- California AB-2998 Compliant

Flammability

- CA Technical Bulletin 117-2013
- NFPA 260
- UFAC Class 1

For additional product information including detailed cleaning instructions visit our website, [unitedfabrics.com](https://www.unitedfabrics.com)