


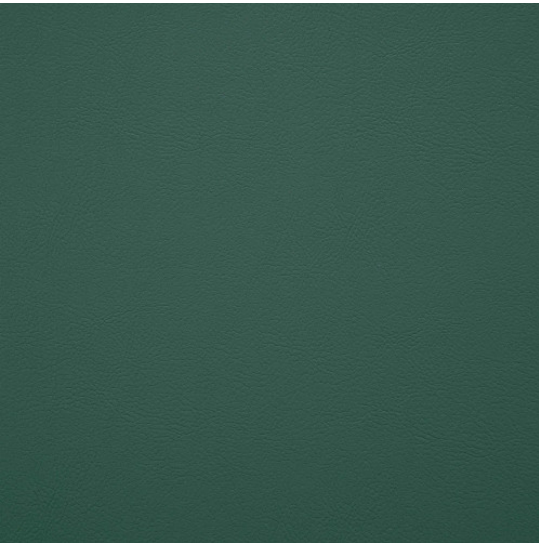

Specifications

ACT® Registered Certification Marks 

|                  |                                     |
|------------------|-------------------------------------|
| Application      | Upholstery, Indoor                  |
| Content          | 100% PVC Vinyl                      |
| Backing          | 100% Polyester                      |
| Finish / Topcoat | Soil & Stain Resistant Topcoat      |
| Weight           | 26.0 oz./yd.                        |
| Width            | 54.000"                             |
| Fabric Shown     | Up the Roll                         |
| Origin           | Colombia                            |
| Collection       | <a href="#">726: Comfort Vinyls</a> |

Product Attributes

- Anti-Static
- Sulfide Stain Resistant

Performance Characteristics

|                                                  |                               |
|--------------------------------------------------|-------------------------------|
| Abrasion Resistance<br>ASTM D4157                | 100,000 Double Rubs           |
| Flex Resistance<br>ASTM D2097                    | 30,000 Cycles                 |
| Tear Strength, Tongue Tear<br>ASTM D2261         | Warp: 8.7 lbs / Weft: 9.8 lbs |
| Wet Crocking<br>AATCC 8                          | Grade: 4                      |
| Dry Crocking<br>AATCC 8                          | Grade: 4                      |
| Colorfastness to Light<br>AATCC 16 (Hours/Grade) | Hours: 1,000 / Grade: 4       |
| Adhesion of Coating<br>ASTM D751                 | Warp: 3.3 lbs / Weft: 3.3 lbs |
| Cold Crack<br>CFFA 10                            | - 10 F                        |

Flammability

- UFAC Class 1
  - NFPA 260
- CA Technical Bulletin 117-2013

Environment/Certifications

- California AB-2998 Compliant
  - Prop 65 Compliant
- PFAS Free
  - RoHS Compliant

