




Specifications

ACT® Registered Certification Marks

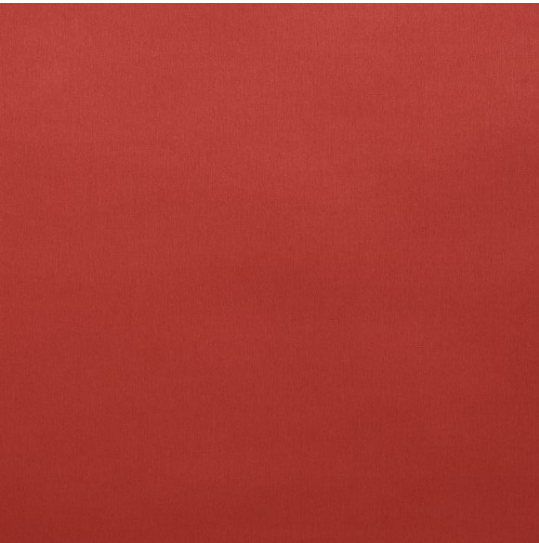

Application	Upholstery, Indoor
Content	100% PVC Vinyl
Backing	100% Polyester
Finish / Topcoat	Soil & Stain Resistant Topcoat
Weight	30.0 oz./yd.
Width	54.000"
Fabric Shown	Up the Roll
Origin	Costa Rica

Product Attributes

- Sulfide Stain Resistant
- Anti-Static

Product Notes

- Inventory in Transition to California AB-2998 Compliance

Performance Characteristics

Abrasion Resistance ASTM D4157	100,000 Double Rubs
Tear Strength, Tongue Tear ASTM D751-06	Warp: 5.6 lbs / Weft: 5.9 lbs
Tear Strength, Tack/Trap Tear ASTM D751-06	Warp: 121 lbs / Weft: 72 lbs
Wet Crocking AATCC 8	Grade: 4
Dry Crocking AATCC 8	Grade: 4
Colorfastness to Light CFFA 2 (Hours/Grade)	Hours: 1,000 / Class: 4
Adhesion of Coating ASTM D751	Warp: 3 lbs / Weft: 3 lbs
Cold Crack CFFA 10	- 20 F

Flammability

- UFAC Class 1
- CA Technical Bulletin 117-2013
- NFPA 260

Environment/Certifications

- PFAS Free
- Greenguard Gold Certified
- Formaldehyde Free
- RoHS Compliant
- Prop 65 Compliant