


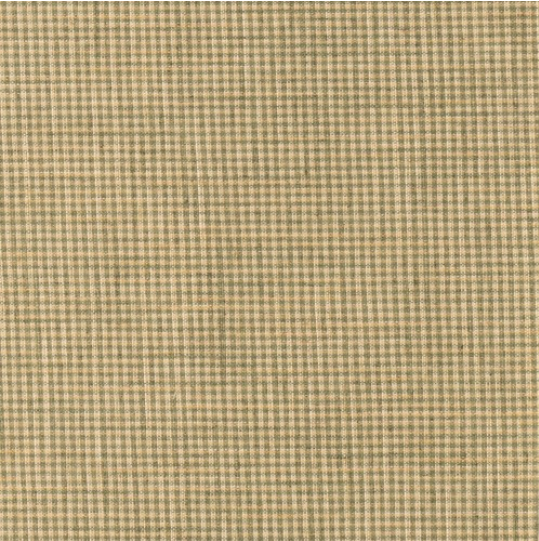

PERMANENT SOIL & STAIN

Specifications

ACT® Registered Certification Marks     

Application	Upholstery, Indoor
Content	85% Polyester 15% Linen
Backing	Acrylic
Finish / Topcoat	Permanent Soil & Stain Protection
Weight	13.3 oz./yd.
Width	54.000"
Fabric Shown	Up the Roll
Origin	India
Repeat Horizontal	.200"
Repeat Vertical	.200"
Collection	625: Home Trends: Cottage Charm

Performance Characteristics

Abrasion Resistance ASTM D4157	50,000 Double Rubs
Pilling ASTM D3511	Class 5
Seam Slippage ASTM D4034	Warp: 65 lbs / Weft: 59.7 lbs
Break Strength ASTM D5034	Warp: 188.3 lbs / Weft: 164.3 lbs
Wet Crocking AATCC 8	Grade: 4
Dry Crocking AATCC 8	Grade: 4
Colorfastness to Light AATCC 16 (Hours/Grade)	Hours: 40 / Grade: 4

Flammability

- UFAC Class 1
 - NFPA 260
- CA Technical Bulletin 117-2013

Environment/Certifications

- California AB-2998 Compliant
 - Prop 65 Compliant
- PFAS Free