


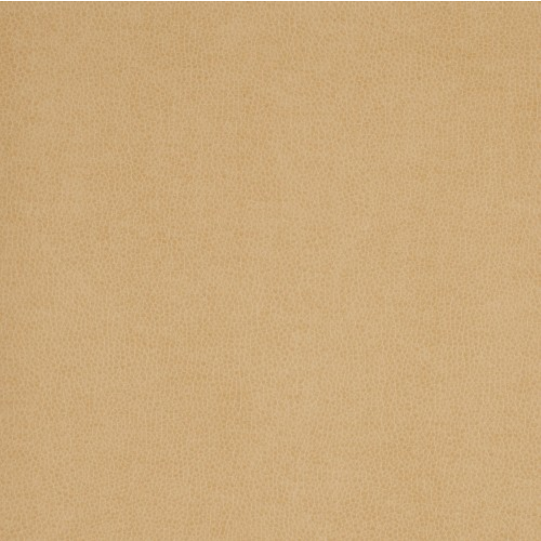

Specifications

ACT® Registered Certification Marks		    
Application	Upholstery, Indoor	
Content	100% Polyurethane (PU)	
Backing	100% Polyester	
Finish / Topcoat	Soil & Stain Resistant Topcoat with Ink Resistant Technology	
Weight	25.4 oz./yd.	
Width	54.000"	
Fabric Shown	Up the Roll	
Origin	China	

Product Attributes

- Sulfide Stain Resistant

Performance Characteristics

Abrasion Resistance ASTM D4157	250,000 Double Rubs
Hydrolysis Resistance ISO 1419 (Tropical Test Method C)	10 weeks
Tear Strength, Tongue Tear ASTM D751-06	Warp: 8.9 lbs / Weft: 12 lbs
Tear Strength, Tack/Trap Tear ASTM D751-06	Warp: 83.9 lbs / Weft: 83 lbs
Wet Crocking AATCC 8	Grade: 5
Dry Crocking AATCC 8	Grade: 5
Colorfastness to Light CFFA 2	Hours: 200 / Class: 4.5
Adhesion of Coating ASTM D751	Warp: 4.42 lbs / Weft 4.48 lbs
Cold Crack CFFA 10	- 20 F

Flammability

- UFAC Class 1
- NFPA 260
- CA Technical Bulletin 117-2013

Environment/Certifications

- California AB-2998 Compliant
- Formaldehyde Free
- REACH Compliant
- Healthier Hospitals Compliant
- PFAS Free
- Phthalate Free
- RoHS Compliant
- Prop 65 Compliant



