


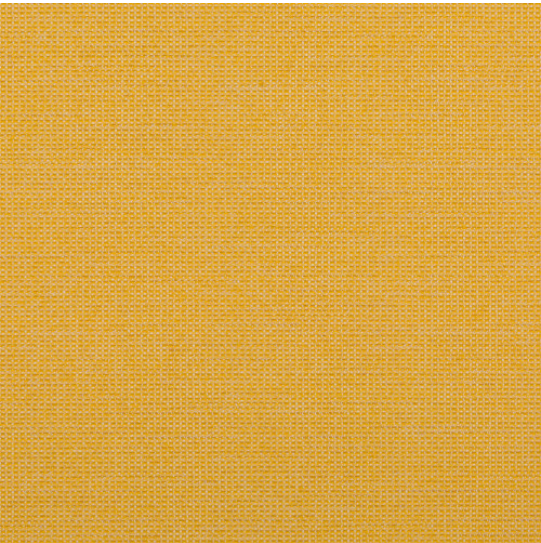

Specifications

ACT® Registered Certification Marks

Application	Upholstery, Indoor/Outdoor
Content	100% Sunbrella Acrylic
Backing	Latex
Weight	12.9 oz./yd.
Width	54.000"
Fabric Shown	Up the Roll
Origin	USA
Collection	526: Sunbrella Farmers Market

Performance Characteristics

Abrasion Resistance	70,000 Double Rubs
ASTM D4157	
Pilling	Class 4.5
ASTM D3511 (Brush Test)	
Seam Slippage	Warp: 74 lbs / Weft: 76 lbs
ASTM D4034 (Grab Test)	
Tensile Strength (Use Break Str. First)	Warp: 207 lbs / Weft: 248 lbs
ASTM D5034	
Wet Crocking	Grade: 5
AATCC 8	
Dry Crocking	Grade: 5
AATCC 8	
Colorfastness to Light	Hours: 2,200 / Class: 4
AATCC 16	

Flammability

- UFAC Class 1
- CA Technical Bulletin 117-2013
- NFPA 260

Environment/Certifications

- California AB-2998 Compliant
- PFAS Free
- Greenguard Gold Certified
- Prop 65 Compliant

