


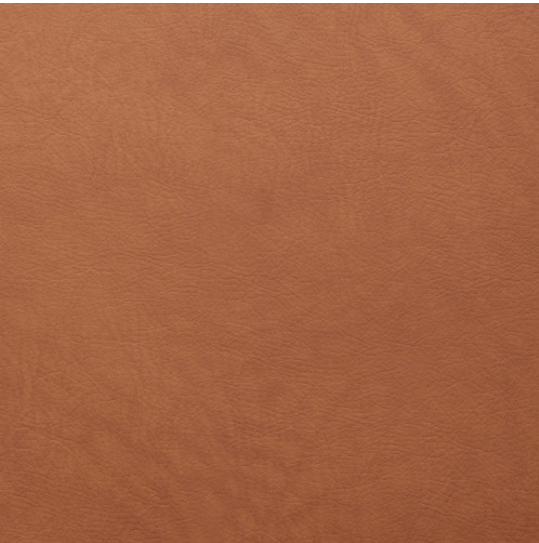

Specifications

ACT® Registered Certification Marks     

Application	Upholstery, Indoor
Content	100% PVC Vinyl
Backing	100% Polyester
Finish / Topcoat	Soil & Stain Resistant Topcoat
Weight	27.0 oz./yd.
Width	54.000"
Fabric Shown	Up the Roll
Origin	Costa Rica
Collection	616: Faux Leather Collection

Product Attributes

- Anti-Static
- Sulfide Stain Resistant

Performance Characteristics

Abrasion Resistance ASTM D4157	100,000 Double Rubs
Tear Strength, Tongue Tear ASTM D751-06	Warp: 5.6 lbs / Weft: 5.9 lbs
Tear Strength, Tack/Trap Tear ASTM D751-06	Warp: 121 lbs / Weft: 72 lbs
Wet Crocking AATCC 8	Grade: 4
Dry Crocking AATCC 8	Grade: 4
Colorfastness to Light CFFA 2 (Hours/Grade)	Hours: 1,000 / Class: 4
Adhesion of Coating ASTM D751	Warp: 3 lbs / Weft: 3 lbs
Cold Crack CFFA 10	- 20 F

Flammability

- UFAC Class 1
 - NFPA 260
- CA Technical Bulletin 117-2013

Environment/Certifications

- California AB-2998 Compliant
 - Formaldehyde Free
 - RoHS Compliant
- PFAS Free
 - Prop 65 Compliant