




Specifications

ACT® Registered Certification Marks

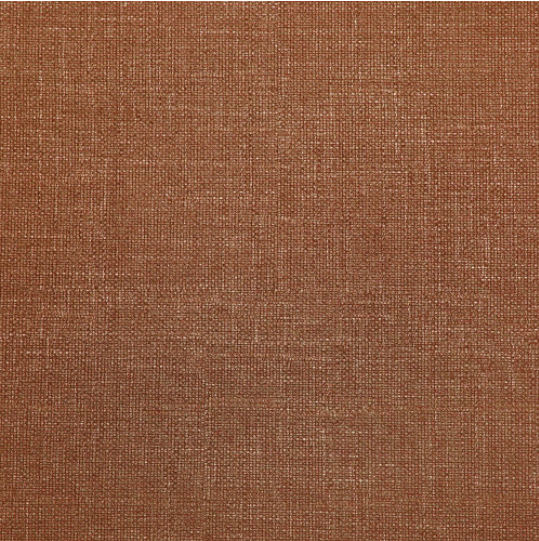

Application	Upholstery, Indoor
Content	100% PVC Vinyl
Backing	100% Polyester
Finish / Topcoat	Soil & Stain Resistant Topcoat
Weight	5.7 oz./yd.
Width	54.000"
Fabric Shown	Up the Roll
Origin	Colombia
Collection	Comfort Vinyls

Performance Characteristics

Abrasion Resistance ASTM D4157	100,000 Double Rubs
Flex Resistance ASTM D2097	30,000 Cycles
Tear Strength, Tongue Tear ASTM D2261	Warp: 5.6 lbs / Weft: 5.9 lbs
Wet Crocking AATCC 8	Grade: 4
Dry Crocking AATCC 8	Grade: 4
Colorfastness to Light AATCC 16 (Hours/Grade)	Hours: 1,000 / Grade: 4
Adhesion of Coating ASTM D751	Warp: 3.3 lbs / Weft: 3.3 lbs
Cold Crack CFFA 10	- 10 F

Product Attributes

- Anti-Static
- Sulfide Stain Resistant

Flammability

- UFAC Class 1
 - NFPA 260
- CA Technical Bulletin 117-2013

Environment/Certifications

- California AB-2998 Compliant
 - Phthalate Free
- PFAS Free

