


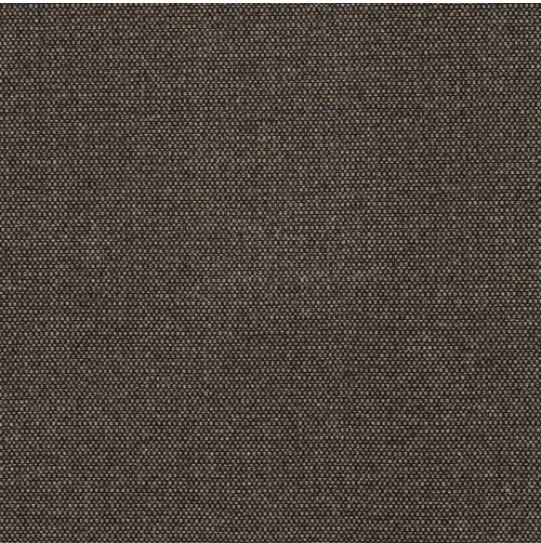

PERMANENT SOIL & STAIN

Specifications

|                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| ACT® Registered Certification Marks      |                                   |
| Application                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Upholstery, Indoor                |
| Content                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 100% Polyester                    |
| Backing                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Needlepunch                       |
| Finish / Topcoat                                                                                                                                                                                                                                                                                                                                                                                                                                              | Permanent Soil & Stain Protection |
| Weight                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 13.8 oz./yd.                      |
| Width                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 54.000"                           |
| Fabric Shown                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Up the Roll                       |
| Origin                                                                                                                                                                                                                                                                                                                                                                                                                                                        | China                             |
| Collection                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <a href="#">525: Explorer</a>     |

Performance Characteristics

|                                                  |                                   |
|--------------------------------------------------|-----------------------------------|
| Abrasion Resistance<br>ASTM D4157                | 100,000 Double Rubs*              |
| Pilling<br>ASTM D3511                            | Class 5                           |
| Seam Slippage<br>ASTM D4034                      | Warp: 50.4 lbs / Weft: 65.7 lbs   |
| Break Strength<br>ASTM D5034                     | Warp: 131.4 lbs / Weft: 133.5 lbs |
| Wet Crocking<br>AATCC 8                          | Grade: 5                          |
| Dry Crocking<br>AATCC 8                          | Grade: 5                          |
| Colorfastness to Light<br>AATCC 16 (Hours/Grade) | Hours: 40 / Grade: 5              |

\* Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan.

Flammability

-  NFPA  
Technic  
Bulletin  
117-  
2013

Environment/Certifications

- California AB-2998 Compliant
- PFAS Free
- Prop 65 Compliant