


PIQUE

Sand 40421-0000

UNITED
SINCE *Fabrics* 1946

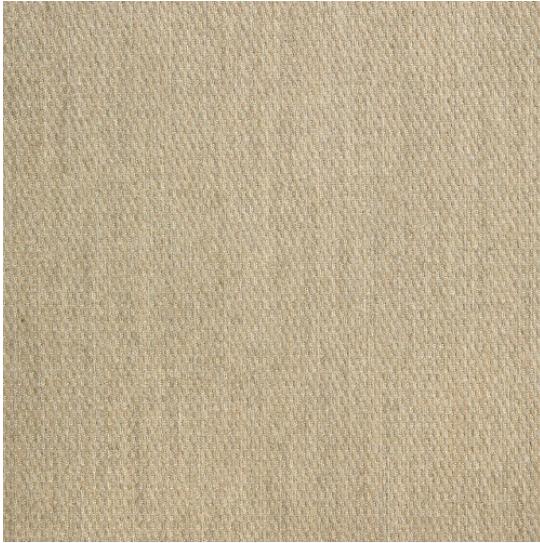

OUTDOOR



BLEACH
CLEANABLE



MADE IN
THE USA

 sunbrella®

 sunbrella®
Contract

Specifications

ACT® Registered Certification Marks



Application Upholstery, Indoor/Outdoor

Content 100% Sunbrella Acrylic

Weight 14.6 oz./yd.

Width 54.000"

Fabric Shown Railroaded

Origin USA

Collection Sunbrella Fusion Collection

Product Notes

- Prop 65 Compliant
- Special Order Item
- California AB-2998 Compliant
- Inventory in Transition to PFAS Free

Performance Characteristics

Abrasion Resistance 50,000 Double Rubs
ASTM D4157

Pilling Class 3
ASTM D3511 (Brush Test)

Seam Slippage Warp: 56.2 lbs / Weft: 56.03 lbs
ASTM D4034 (Grab Test)

Break Strength Warp: 328.67 lbs / Weft: 185.33
ASTM D5034 lbs

Wet Crocking Grade: 5
AATCC 8

Dry Crocking Grade: 5
AATCC 8

Colorfastness to Light Hours: 2,200 / Grade: 4
AATCC 16 (Hours/Grade)

Flammability

- UFAC Class 1
- CA Technical Bulletin 117-2013
- NFPA 260



(800) 347-8344

UNITEDFABRICS.COM

SALES@UNITEDFABRICS.COM