


SNAPSHOT

68 Natural

UNITED
SINCE *Fabrics* 1946

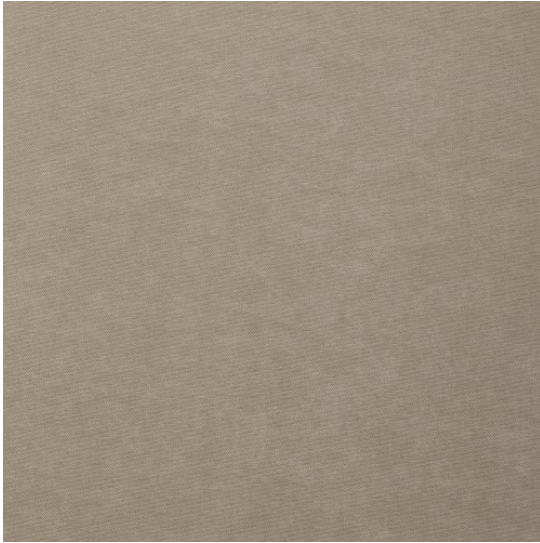

Specifications

ACT® Registered Certification Marks



Application	Upholstery, Indoor
Content	100% Polyester
Finish / Topcoat	Resilience TX Soil/Stain Protection
Weight	13.6 oz./yd.
Width	54.000"
Fabric Shown	Up the Roll
Origin	Turkey
Collection	Wayfinder

Product Notes

- Prop 65 Compliant
- California AB-2998 Compliant
- Inventory in Transition to PFAS Free

Performance Characteristics

Abrasion Resistance ASTM D4157	100,000 Double Rubs
Pilling ASTM D3511 (Brush Test)	Class 5
Seam Slippage ASTM D4034 (Grab Test)	Warp: 84 lbs / Weft: 83.5 lbs
Break Strength ASTM D5034	Warp: 243 lbs / Weft: 99 lbs
Wet Crocking AATCC 8	Grade: 5
Dry Crocking AATCC 8	Grade: 5
Colorfastness to Light AATCC 16 (Hours/Grade)	Hours: 40 / Grade: 5

Flammability

- UFAC Class 1
- CA Technical Bulletin 117-2013
- NFPA 260



(800) 347-8344

UNITEDFABRICS.COM

SALES@UNITEDFABRICS.COM