


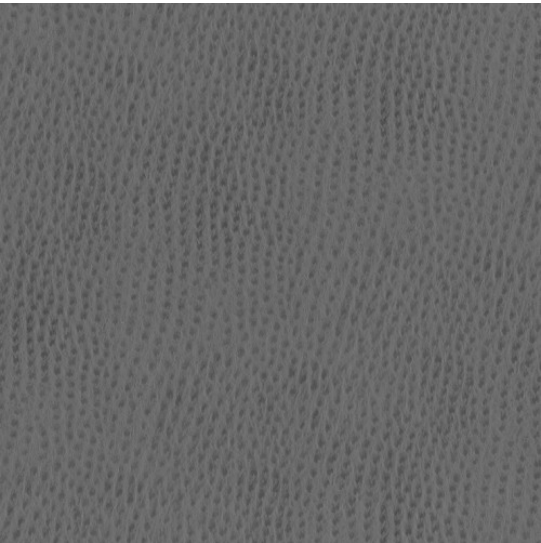

Specifications

Table with 2 columns: Specification, Value. Rows include Application (Upholstery, Indoor), Content (100% PVC Vinyl), Backing (100% Polyester), Finish / Topcoat (Soil & Stain Resistant Topcoat), Weight (23.5 oz./yd.), Width (54.000"), Fabric Shown (Up the Roll), and Origin (Taiwan).

Product Attributes

- Sulfide Stain Resistant
- Oil Resistant

Product Notes

- Inventory in Transition to California AB-2998 Compliance

Performance Characteristics

Table with 2 columns: Performance Characteristic, Value. Rows include Abrasion Resistance (150,000 Double Rubs), Break Strength (Warp: 86 lbs / Weft: 62 lbs), Tear Strength, Tongue Tear (Warp: 5.1 lbs / Weft: 6.9 lbs), Tear Strength, Tack/Trap Tear (Warp: 41 lbs / Weft: 32 lbs), Wet Crocking (Grade: 5), Dry Crocking (Grade: 5), Colorfastness to Light (Hours: 650 / Grade: 4), Adhesion of Coating (Warp: 7.4 lbs / Weft: 7.5 lbs), and Cold Crack (CFFA 10).

Flammability

- FMVSS 302
- U FAC Class 1
- CA Technical Bulletin 117-2013
- NFPA 260

Environment/Certifications

- PFAS Free
- Formaldehyde Free
- Phthalate Free
- REACH Compliant
- RoHS Compliant
- Prop 65 Compliant

