


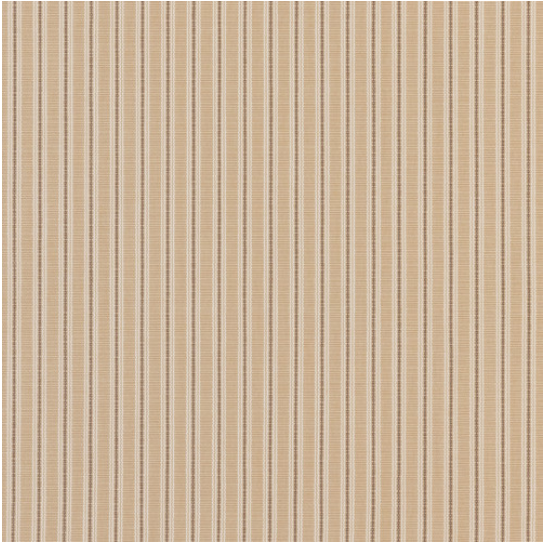

Specifications

ACT® Registered Certification Marks     

Application	Upholstery, Indoor/Outdoor
Content	100% Sunbrella Acrylic
Backing	Acrylic
Finish / Topcoat	Sunbrella Water & Stain Repellent
Weight	12.3 oz./yd.
Width	54.000"
Fabric Shown	Railroaded
Origin	USA
Repeat Horizontal	.670"
Collection	Fusion

Product Notes

- Special Order Item

Performance Characteristics

Abrasion Resistance ASTM D4157	100,000 Double Rubs
Pilling ASTM D3511	Class 5
Seam Slippage ASTM D4034	Warp: 60.2 lbs / Weft: 86.5 lbs
Break Strength ASTM D5034	Warp: 227.9 lbs / Weft: 235.9 lbs
Wet Crocking AATCC 8	Grade: 5
Dry Crocking AATCC 8	Grade: 5
Colorfastness to Light AATCC 16 (Hours/Grade)	Hours: 2,200 / Grade: 4

Flammability

- UFAC Class 1
- CA Technical Bulletin 117-2013
- NFPA 260

Environment/Certifications

- California AB-2998 Compliant
- PFAS Free



(800) 347-8344

UNITEDFABRICS.COM

SALES@UNITEDFABRICS.COM