


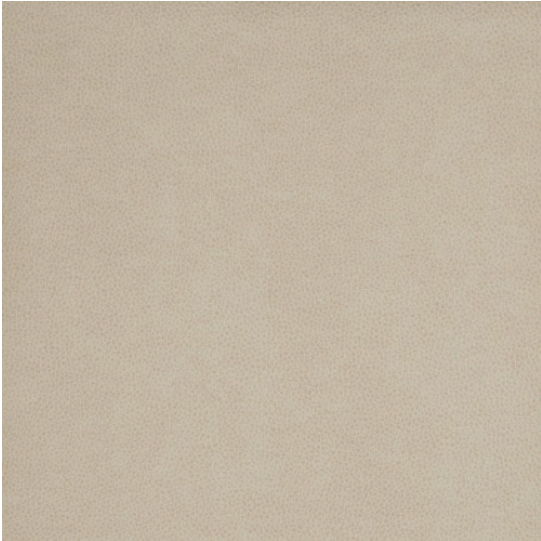

Specifications

ACT® Registered Certification Marks		    
Application	Upholstery, Indoor	
Content	100% Polyurethane (PU)	
Backing	100% Polyester	
Finish / Topcoat	Soil & Stain Resistant Topcoat with Ink Resistant Technology	
Weight	25.4 oz./yd.	
Width	54.000"	
Fabric Shown	Up the Roll	
Origin	China/Vietnam (Inventory in Transition)	

Product Attributes

- Sulfide Stain Resistant

Performance Characteristics

Abrasion Resistance ASTM D4157	250,000 Double Rubs
Flex Resistance ASTM D2097	25,000 Cycles
Hydrolysis Resistance ISO 1419 (Tropical Test Method C)	10 weeks
Tear Strength, Tongue Tear ASTM D751-06	Warp: 8.9 lbs / Weft: 12 lbs
Tear Strength, Tack/Trap Tear ASTM D751-06	Warp: 83.9 lbs / Weft: 83 lbs
Wet Crocking AATCC 8	Grade: 5
Dry Crocking AATCC 8	Grade: 5
Colorfastness to Light CFFA 2	Hours: 200 / Class: 4.5
Adhesion of Coating ASTM D751	Warp: 4.42 lbs / Weft 4.48 lbs
Cold Crack CFFA 10	- 20 F

Flammability

- UFAC Class 1
- NFPA 260
- CA Technical Bulletin 117-2013

Environment/Certifications

- California AB-2998 Compliant
- Formaldehyde Free
- REACH Compliant
- Healthier Hospitals Compliant
- PFAS Free
- Phthalate Free
- RoHS Compliant
- Prop 65 Compliant



(800) 347-8344

UNITEDFABRICS.COM

SALES@UNITEDFABRICS.COM