




OUTDOOR



BLEACH
CLEANABLE

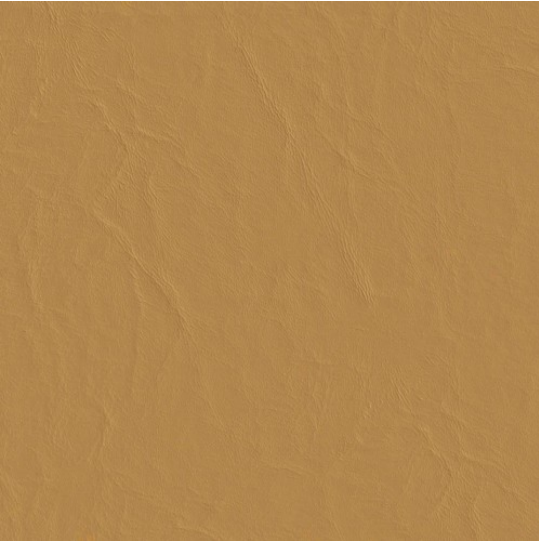

ANTIMICROBIAL

Specifications

ACT® Registered Certification Marks



Application	Upholstery, Indoor/Outdoor
Content	100% PVC Vinyl
Backing	100% Polyester
Finish / Topcoat	Soil & Stain Resistant Topcoat
Weight	30.0 oz./yd.
Width	54.000"
Fabric Shown	Up the Roll
Origin	Thailand

Product Attributes

- Mildew Resistant

Performance Characteristics

Abrasion Resistance ASTM D4157	50,000 Double Rubs
Break Strength ASTM D5034	Warp: 85 lbs / Weft: 70 lbs
Tear Strength, Tack/Trap Tear ASTM D751-06	Warp: 20 lbs / Weft: 20 lbs
Wet Crocking AATCC 8	Grade: 4
Dry Crocking AATCC 8	Grade: 4
Colorfastness to Light CFFA 2 (Hours/Grade)	Hours: 650 / Class: 4
Adhesion of Coating ASTM D751	Warp: 3 lbs / Weft: 3 lbs
Cold Crack CFFA 10	- 20 F

Flammability

- UFAC Class 1
- CA Technical Bulletin 117-2013
- BIFMA Class 1
- NFPA 260

Environment/Certifications

- California AB-2998 Compliant
- PFAS Free