


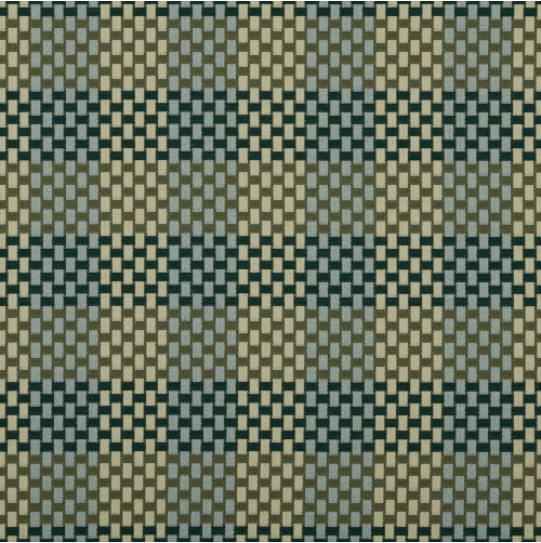

Specifications

ACT® Registered Certification Marks	    
Application	Upholstery, Indoor/Outdoor
Content	69.500% Sunbrella Acrylic 30.500% Polyester
Finish / Topcoat	Sunbrella Water & Stain Repellent
Weight	11.2 oz./yd.
Width	54.000"
Fabric Shown	Up the Roll
Origin	USA
Repeat Horizontal	3.550"
Repeat Vertical	3.750"
Collection	526: Sunbrella Farmers Market

Performance Characteristics

Abrasion Resistance ASTM D4157	72,500 Double Rubs
Pilling ASTM D3511 (Brush Test)	Class 4
Seam Slippage ASTM D4034 (Grab Test)	Warp: 42.1 lbs / Weft: 61.5 lbs
Break Strength ASTM D5034	Warp: 363.6 lbs / Weft: 464.9 lbs
Wet Crocking AATCC 8	Grade: 5
Dry Crocking AATCC 8	Grade: 5
Colorfastness to Light AATCC 16	Hours: 2,200 / Class: 4

Flammability

- UFAC Class 1
- NFPA 260
- CA Technical Bulletin 117-2013

Environment/Certifications

- California AB-2998 Compliant
- Greenguard Gold Certified
- PFAS Free
- REACH Compliant



(800) 347-8344

UNITEDFABRICS.COM

SALES@UNITEDFABRICS.COM